


GATOR Cone Crusher

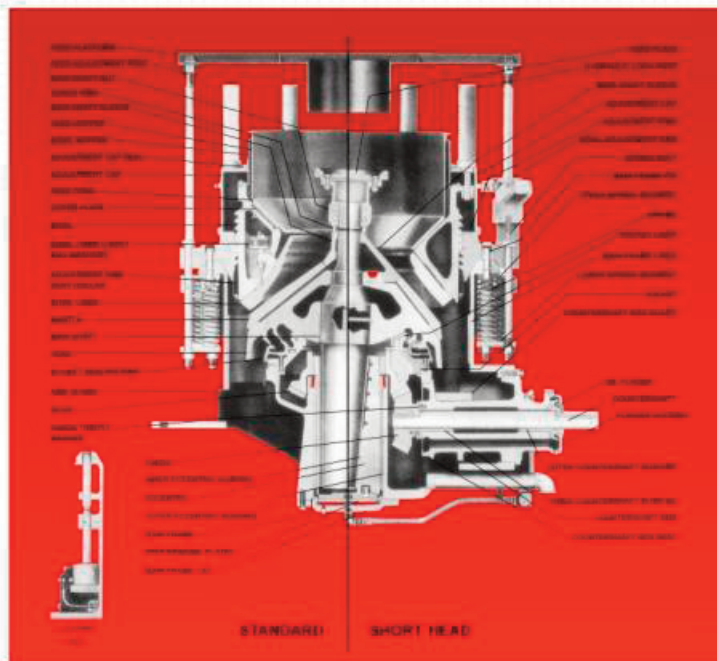

TYPICAL AGGREGATE PRODUCT GRADATIONS

FEED MATERIAL RATING - AVERAGE/HARD
Open Circuit Product Analysis* (% Passing)
for Given Closed Side Setting of Crusher

Product Size Inch (mm)	Closed Side Setting of Crusher, Inch (mm)							
	1/4" (6 mm)	3/8" (10 mm)	1/2" (13 mm)	3/4" (19 mm)	1" (25 mm)	1-1/4" (32 mm)	1-1/2" (38 mm)	2" (51 mm)
4" (102 mm)								100
3" (76 mm)							100	91
2-1/2" (64 mm)						100	95	82
2" (51 mm)					100	93	86	70
1-1/2" (38 mm)				100	100	94	84	60
1-1/4" (32 mm)				95	82	79	70	51
1" (25 mm)			100	86	70	60	54	44
3/4" (19 mm)		100	100	84	60	43	33	22
1/2" (13 mm)	100	86	70	60	40	29	22	17
3/8" (10 mm)	94	70	51	44	32	20	17	13
1/4" (6 mm)	70	44	32	22	17	14	9	7
3/16" (5 mm)	50	32	25	17	13	11	7	6
No.6 (3 mm)	34	23	18	12	10	8	5	4
No.8 (2 mm)	25	17	13	9	7	6	4	3

* Note: These table values will vary with the method of feeding, selection of crusher cavity, the weight, cleanliness and moisture contents of the material and its fracture pattern. Accurate values should be established by actual testing.